



Introducing the **VL1** Volumetric Troffer



1X4



2X2



2X4

1x4 & 2x2 = 3080 to 4900 lm

2x4 = 3080 to 12,600 lm

Up to 140 lm/W

120-347V

White powder coated steel housing

IK07 Rated non-yellowing PMMA light
diffusing acrylic lens

Controls Ready

Battery backup available
(field or factory installed)

PowerSet & FieldCCeT

DLC Standard

Estimated L70: 100,000 Hours


CONTROLS READY

EASILY ADD PUSH-IN
STANDALONE OR NLC
CONTROLS




BATTERY BACKUP

8, 18W OR 40W FIELD OR
FACTORY INSTALLED



ACCESSORIES

SURFACE & RECESSED
MOUNTING KITS
AVAILABLE

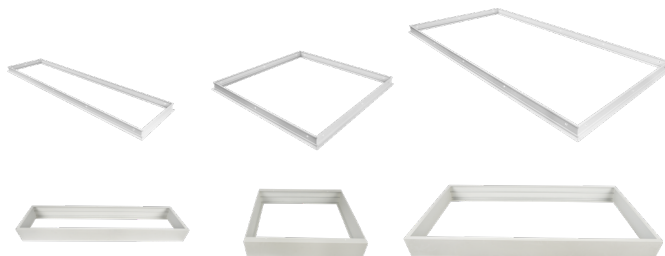

CONTACT US TODAY!



RoHS
Compliant

FC

CAN
ICES-005

IC
RATED

